


Acqiris SA220P  
14-bit ADC Card, 2 channels  
2 GS/s or 1 GS/s  
with FPGA signal processing



DATASHEET

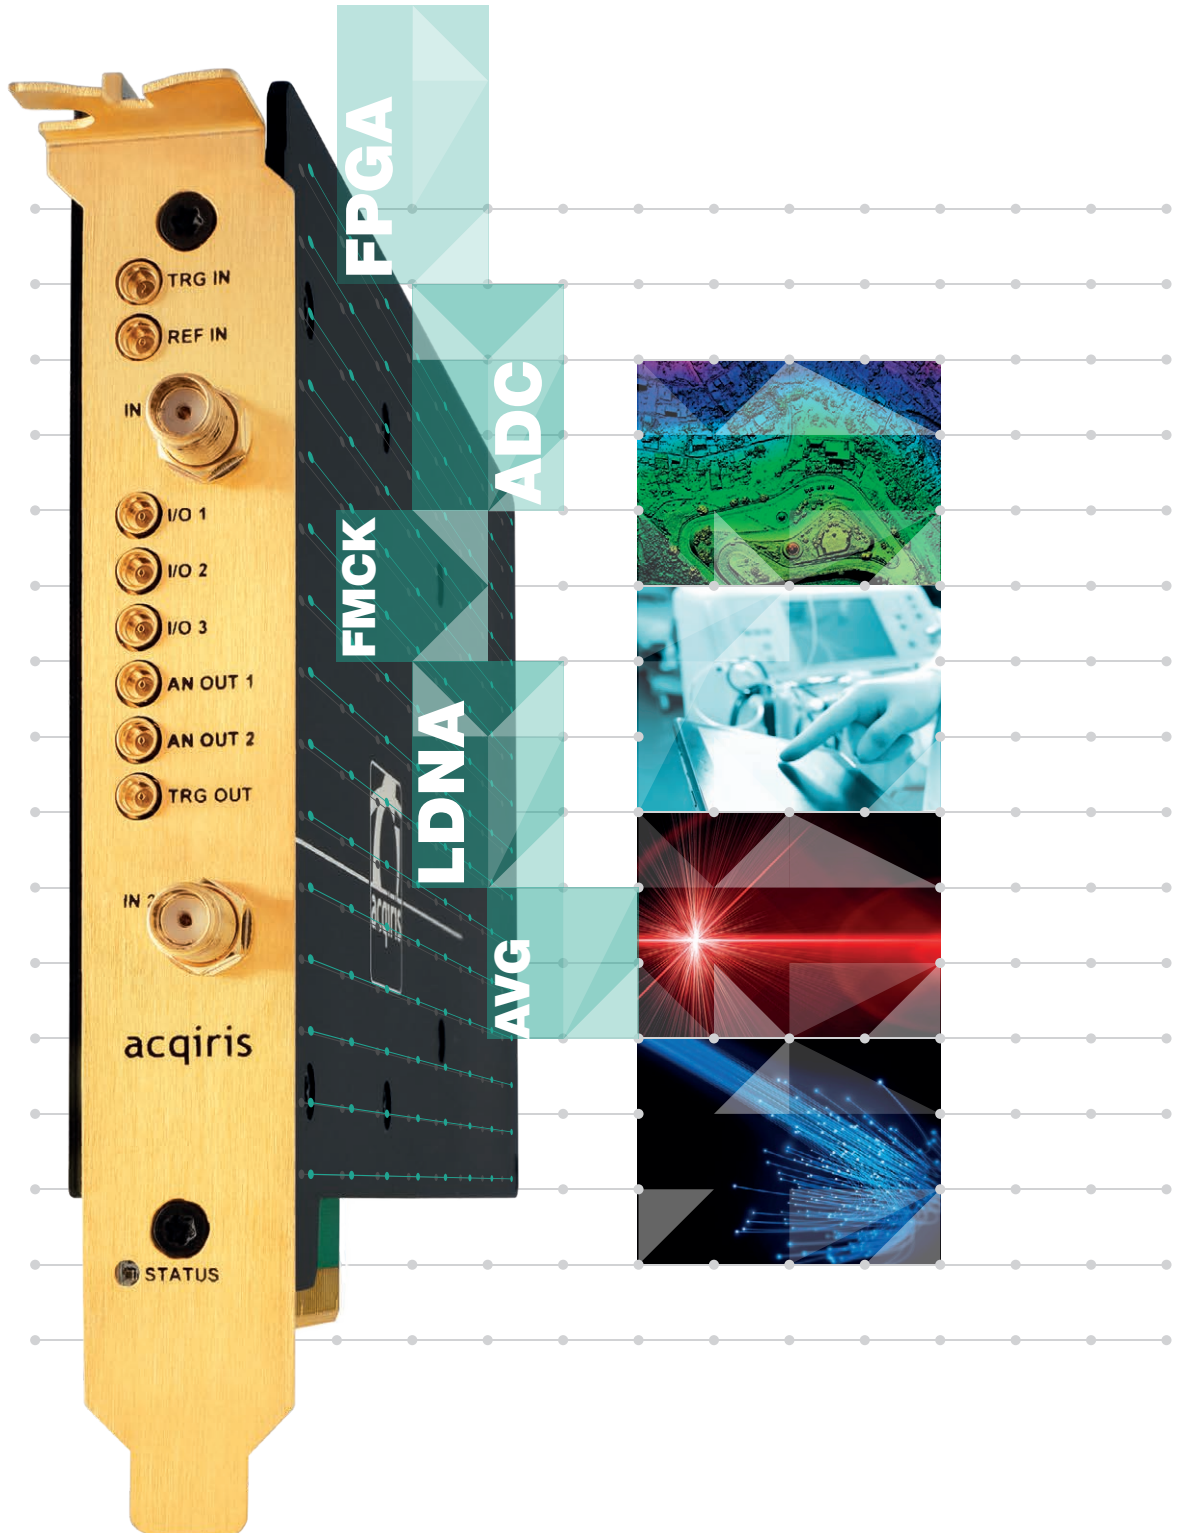

# See deeper and sharper than before

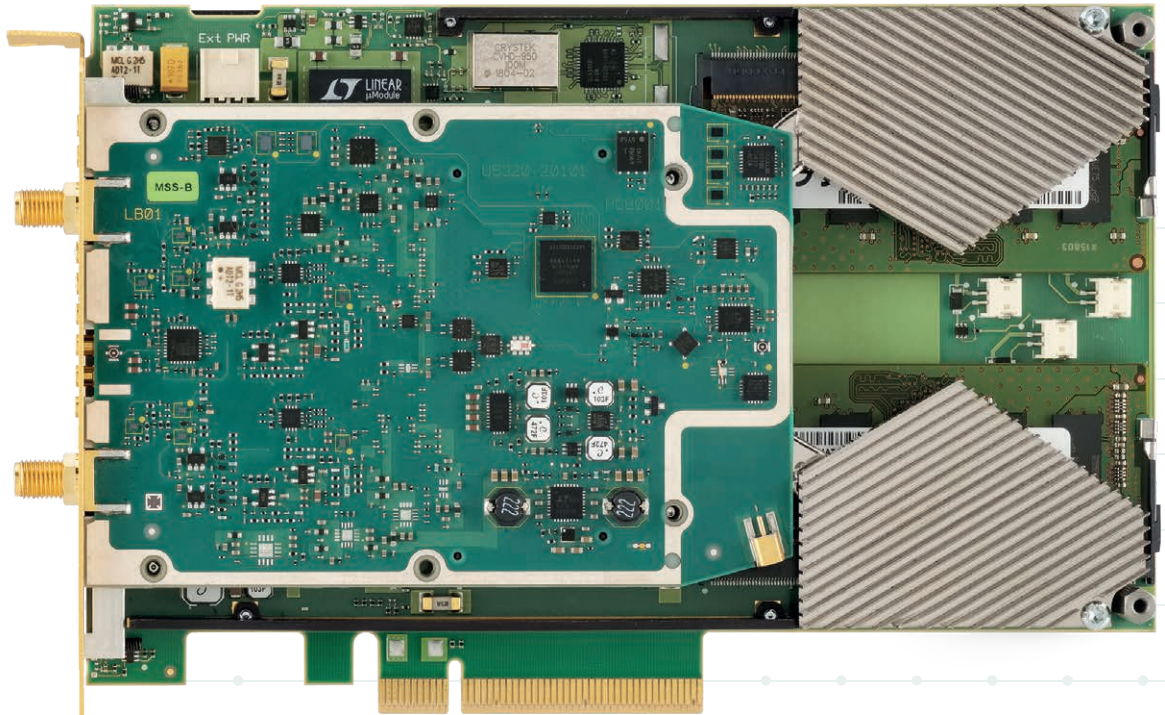


Figure 1. SA220P ADC card - Open view.

## New generation of Signal Acquisition cards

The SA2 is Acqiris's high-performance 14-bit ADC card platform, performing fast signal acquisitions from 1 GS/s up to 10 GS/s, with excellent signal fidelity across a wide bandwidth. This new generation focuses on addressing unique OEM application needs.

The SA220P is the entry model of the SA2 product line, enabling up to 2 GS/s simultaneously on two channels. This unique DC coupled 14-bit digitizer captures waveforms from DC up to 1.2 GHz.

### Features depending on your application (options)

#### Increased recording time:

- Up to 8 GB memory allowing for 4 GSamples
- Streaming capability up to 6.5 GB/s

#### Real-time processing:

- Real-time averaging
- Data compression
- Simultaneous acquisition and readout, enabling streaming with high data throughput
- Custom real time-processing

### Essential features

#### Accurate and precise measurement

- 14-bit resolution
- 2 channels simultaneously sampling
- 2 sampling rate versions: 2 GS/s or 1 GS/s
- DC up to 1.2 GHz bandwidth
- DC coupled, 50  $\Omega$  input impedance
- Selectable full scale range: 500 mV or 2.5 V (FSR)
- Programmable DC offset ( $\pm$  FSR/2)

#### Signal fidelity

- Low noise density and low distortion
- Optimized frequency response flatness
- Excellent and flat SFDR over a large analysis bandwidth (70 dBc)
- Optimized response allowing few hundred picoseconds pulse analysis.
- Unique 15 ps RMS trigger time interpolator precision.

### Product description

All the ADC cards from the SA2 generation implement a proprietary low noise front-end enabling undisputed spurious-free dynamic range (SFDR) and signal noise ratio (SNR) performances in high frequencies.

This makes the ADC cards ideal for OEM applications requiring digitizer sampling at wide bandwidth and very high dynamic range, especially at 500 mV full scale range.

The PCIe Gen 3 interface enables high data transfer rate and streaming capabilities to the host computer at up to 6.5 GB/s.

This ADC card occupies a single PCIe slot, offering high performance in a small footprint.

For information on specific application please contact us: [support@acqiris.com](mailto:support@acqiris.com).



# Integration in your system

Benefit from responsive signal acquisition solutions for your application.

## Applications

Because each OEM project is unique, we develop data acquisition cards and modules based on standard platform that can be fine-tuned to address your particular challenges.

We propose signal acquisition solutions easy to integrate in your system, fitting your actual requirements, and including only what you need.



The SA220P includes on-board FPGA offering real-time signal processing capability such as waveform averaging or peak listing. We also propose to open the FPGA for custom real-time processing.

More than a digitizer, the ADC Card's I/O signals allow for system control.

This PCIe card with advanced real-time processing capabilities is specially designed for embedded OEM applications in a variety of challenging measurements, imaging and processing systems, including:

- Analytical time-of-flight (TOF)
- Ultrasonic non-destructive testing
- Medical research and imaging instrumentation
- Environmental monitoring using laser scanning (LiDAR)
- Distributed strain and temperature sensors (DSTS)

Overall performance of the SA220P enables deeper, faster and more accurate measurement and analysis for final products.

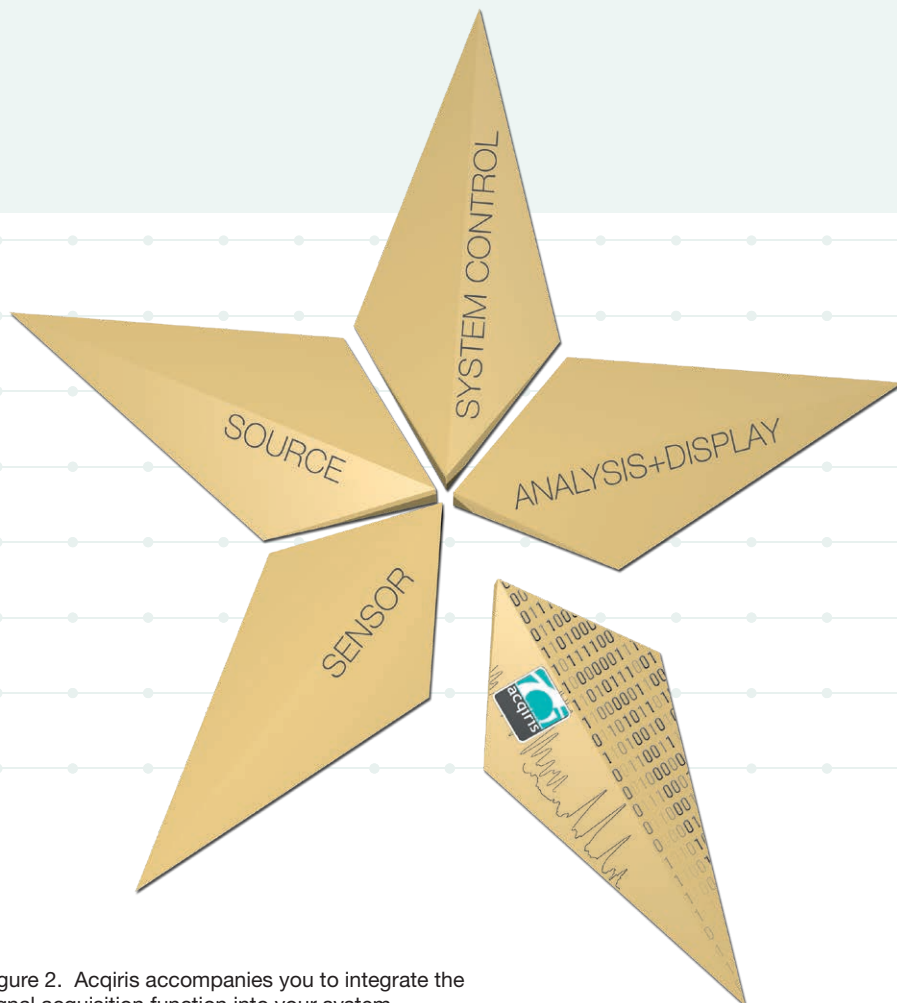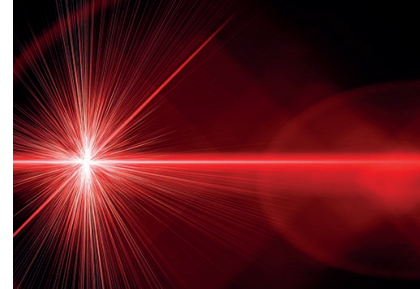

## Easy software integration

The ADC cards of the SA2 family are supplied with a comprehensive portfolio of module drivers, documentation, examples, and software tools to assist you to quickly develop your system with your software platform of choice.

Additionally, our integration experts are there to help you.

## Compliance

Designed to benefit from very fast data interface, the product is compliant with PCI Express 3.0 x8 standard.

Figure 2. Acqiris accompanies you to integrate the signal acquisition function into your system. Our data acquisition solutions aim at improving the overall performances of your end-product.

# Hardware platform

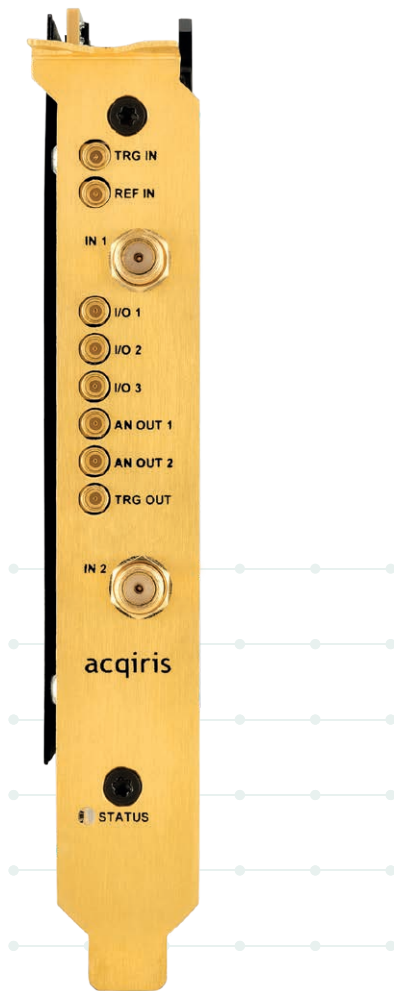


Figure 3. SA220P front panel, with analog inputs and multiple programmable I/O signals.

## Integration

In a host computer or externally, the SA220P signal acquisition card occupies a single half-length PCIe x8 slot, and, additionally, a fan assembly<sup>1</sup> is attached to the rear for effective cooling.

## Unique proprietary technology

Our engineering team developed exclusive proprietary integrated circuits enabling excellent signal performances.

Indeed, the SA220P incorporates:

- a low noise and low distortion signal conditioning amplifier to drive interleaved ADCs
- a specific clock distribution, minimizing the clock jitter and spurious.

## On-board real-time processing

At the heart of the SA220P ADC card is a data processing unit (DPU) based on the Xilinx Kintex UltraScale FPGA. This DPU controls the digitizer functionality by implementing digitization of the signal, data storage in the DDR4 SDRAM memory and transfer through the PCIe connection to the host computer.

Moreover, this powerful feature allows real time signal processing and data reduction to be carried out on-board, minimizing transfer volumes and speeding-up analysis.

## Sampling rate

The SA220P is proposed with two sampling rate versions:

- 2 channels at 2 GS/s (default)
- 2 channels at 1 GS/s.

## Block diagram

### Trigger

The trigger source can be a signal level acquired on any of the two input channels (IN 1 or IN 2), or an external signal applied on TRG IN, or a software trigger.

### Trigger precision and resolution

The trigger time interpolator technology achieves a unique trigger resolution of < 1 ps (*nominal*) and a precision of 15 ps (*nominal*).

### Programmable I/Os

Three programmable I/Os are available for your system control and optimization.

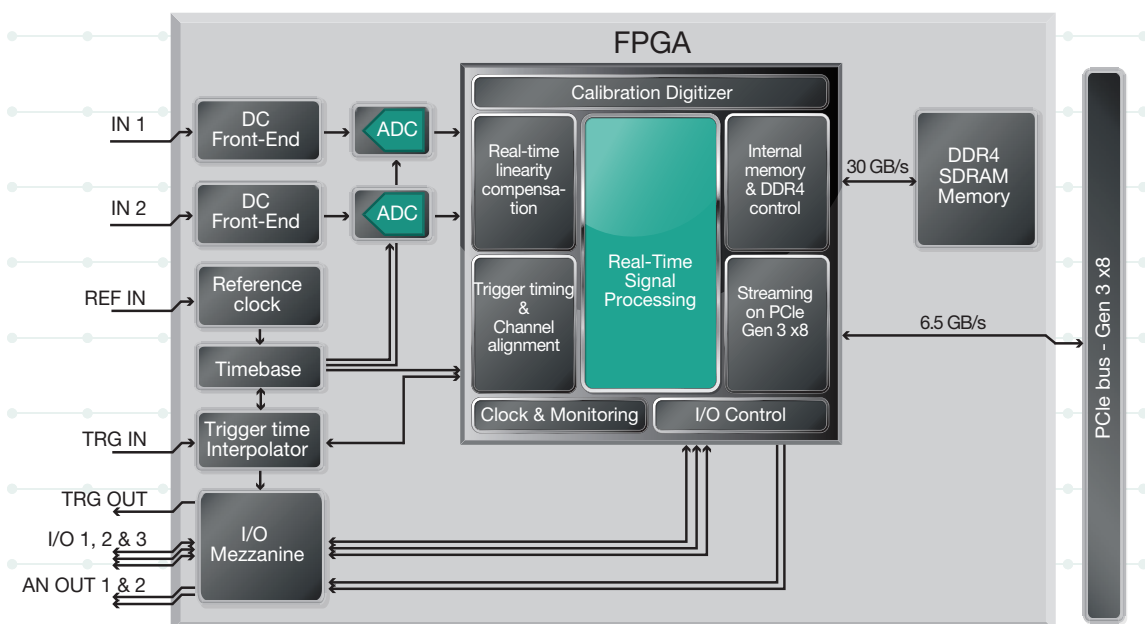


Figure 4. Top level block diagram of the SA220P PCIe ADC card, with on-board real-time processing.

1. See specifications and mechanical characteristics section for full dimension with fan assembly.



# Software platform

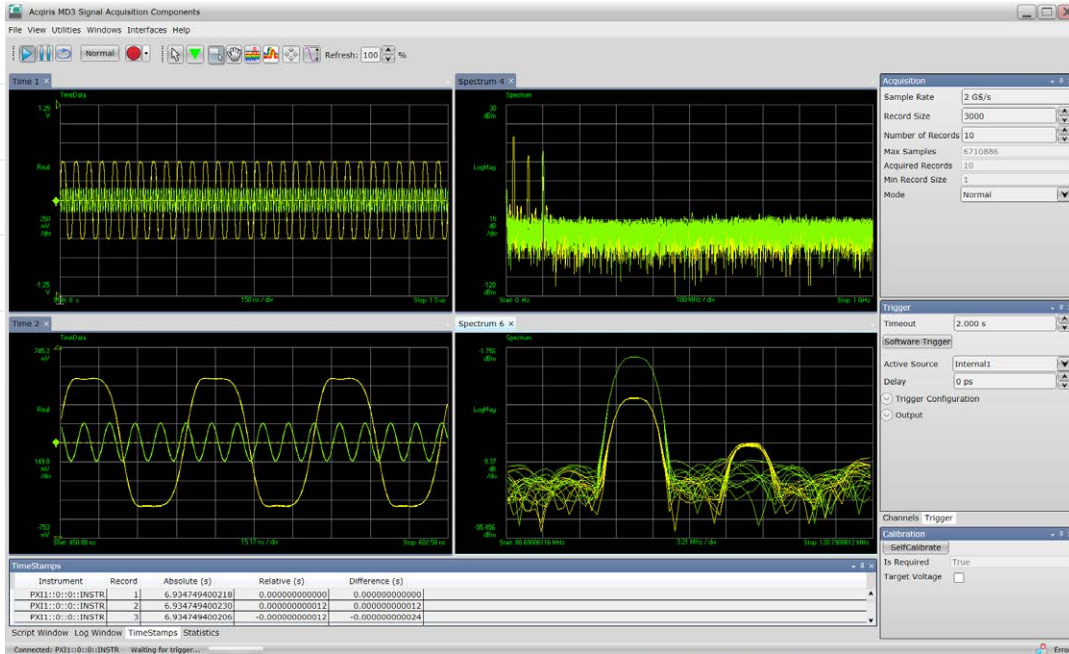


Figure 5. The software front panel (SFP) interface can display acquired data in time domain, frequency domain and provide additional useful information, such as the list of trigger time-stamps.

## Drivers

The module comes with Windows or Linux drivers that work in the most popular development environments, to make easier the integration in your system.

### Software information

Supported operating systems and host computers	See system requirements on page 11.
Standard compliant drivers	Standard compliant drivers IVI-C, IVI.NET, LabVIEW
Supported application development environments (ADE)	VisualStudio (VB.NET, C#, C/C++)

## Software applications

In addition, all the SA2 family cards include the soft front panel (SFP) graphical user interface.

This software application can be used to initially explore the ADC card main capabilities and as a debugging tool during the development phase.

It serves as a friendly and convenient tool for capturing and displaying the acquired data in time or frequency domain.

For further integration in your application, our experts can help by providing code snippet.

# Application options



Figure 6. The SA220P is a fully shielded PCIe Card maximizing both ESD and EMI protection.

## Firmware features

### Accurate trigger timing

When using an external trigger, the digitizer accurately measures and stores the time of each trigger. This information is essential to determine the precise relation between the trigger and the signal digitized samples. The trigger time interpolator (TTI) is a high-precision integrated time-to-digital converter that guarantees trigger time-stamp measurement accuracy.

### Easy mode switch

A simple call to the configuration function allows to automatically switch from the digitizer to the average mode.

## Real-time processing matching your system needs

The firmware in the ADC card's FPGA enables real-time signal processing. Each firmware can have different acquisition modes themselves having various features, including data compression or noise reduction. This results in fine-tuned FPGA firmware allowing the on-board processing to be optimized for your specific applications.

Main ADC card modes:

- Digitizer (DGT)
- Real-time averaging (AVG option)

Optional features:

- Simultaneous acquisition and readout - Streaming records (CST option)
- Zero suppress - Thresholding (ZS1 option)

Dedicated application:

- SS-OCT configuration and firmware (SS4 option)

## Digitizer mode (DGT)

The digitizer firmware allows standard data acquisition, including:

- Digitizer initialization
- Setting of the acquisition
- Management of channel triggering for best synchronization
- Distortion reduction
- Baseline stabilization and digital offset
- Storing data in the internal memory
- Transferring data to the host computer

The multi-record functionality allows to capture successive triggered events occurring within a very short time. The very fast trigger rearm time of the SA220P is a crucial feature to achieve low dead time. To increase trigger flexibility, a pre- or post-trigger delay can also be applied to the trigger position at picoseconds resolution.

Furthermore, the binary decimation can be used to reduce the amount of data, lowering the sample rate by a factor of 2, 4, or 8 – enabling decimated sampling rates at 1 GS/s, 500 MS/s, or 250 MS/s.

## Real-time averaging mode (AVG option)

Averaging signals reduces random noise effects, improving the signal-to-noise ratio as well as increasing resolution and dynamic range.

This mode enables synchronous real-time sampling and accumulation at up to 2 GS/s, featuring:

- Accumulation from 1 to > 65 000 triggers
- Effective acquisition length up to 1M samples
- Noise suppressed accumulation (NSA)
- Self-trigger mode for minimal synchronous noise
- Baseline stabilization and digital offset
- Decimation factors of 2, 4, or 8 with associated low pass filters, enabling decimated sampling rates at 1 GS/s, 500 MS/s, or 250 MS/s.

Besides, the streaming capabilities of the SA220P allows to readout previously averaged record while performing a new accumulation. The averaging firmware enables multiples and successive averaging sequences without missing any trigger.



## Simultaneous acquisition and readout - Streaming records (CST option)

Combined either with the digitizer or the averager mode, this function enables continuous simultaneous acquisition and readout. Compared with standard mode, it allows longer acquisition duration, and is especially dedicated to applications requiring no trigger loss.

In a standard digitizer mode, acquisition and readout are sequential, i.e. the readout of the data is performed after the acquisition has stopped; whereas, with simultaneous acquisition and readout, the acquired records are streamed to the host computer while the next records are acquired and processed. Supporting triggered acquisitions and multiple records of same length, this feature allows gaps between the records.

The firmware manages the streaming of 14-bit raw output data. Using raw data output, the trigger position is known with the accuracy of a sample. For applications requiring trigger position at sub-sample, the information is available on a separated marker stream providing absolute trigger position.

There is no maximum duration of the acquisition: the continuous acquisition and streaming can be sustained endlessly without overflow. The maximum trigger rate and record size depend on the readout data throughput.

Benefitting from the PCIe Gen 3 interface, the SA220P sustains data transfer to the host at up to 6.5 GB/s.

## Zero suppress - Thresholding (ZS1 option)

The zero-suppress is a data reduction mode allowing to select data above a user-defined threshold, as depicted on figure below.

The threshold allows to identify the signal of interest. Data not complying with user selected criteria are suppressed and only the relevant data are stored and transferred to computer.

Particularly efficient when combined with the streaming records feature (CST) the zero-suppress feature performs data compression and allows a larger time window to be captured, assuming a regular occurrence of the trigger condition which periodically segments the continuous data acquisition.

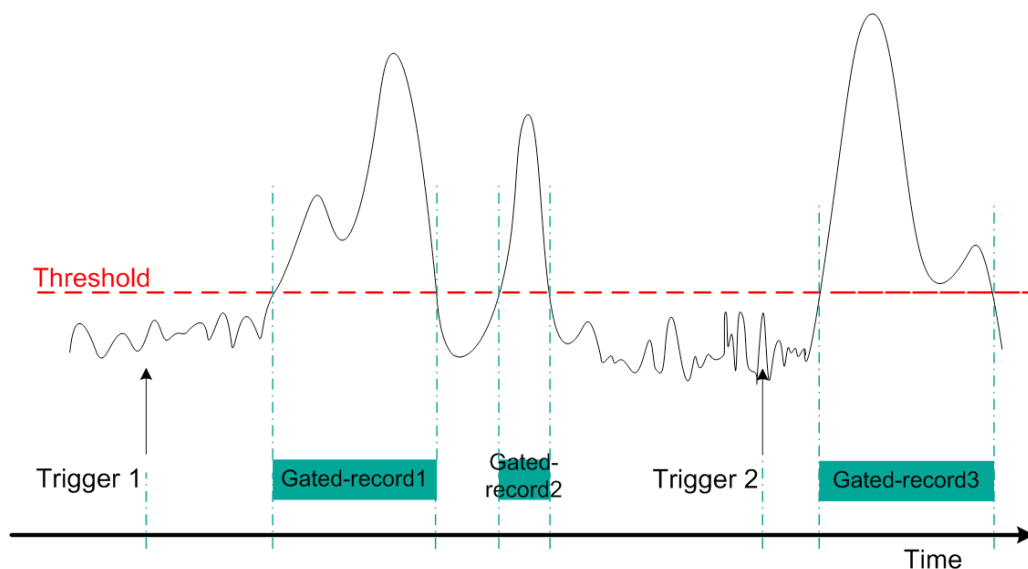


Figure 7. Zero-Suppress compression concept. A gated-record designates the waveform samples selected based on the user-defined threshold criteria.

# Dedicated application options

## Swept source OCT applications<sup>1</sup> (SS4 option)

The swept source optical coherence tomography (SS-OCT) option is a bundle designed for customers who want best-in-class swept source OCT performance and increase image resolution.

Our SS-OCT solution is light-source independent and allows flexible processing by either providing raw data in output or integrating all SS-OCT processing in the on-board FPGA for real-time computation.

The SA220P-SS4 pre-configured version features:

- A-scan rate from 100 kHz to 400 kHz
- up to 2 GS/s sampling rate
- DC to 1.2 GHz bandwidth
- 4 GB acquisition memory
- FFT up to 8K points

SS-OCT dedicated firmware and API are included in this bundle.

Contact us at [SA2@acqiris.com](mailto:SA2@acqiris.com) to receive the SA220-SS4 datasheet dedicated to our solution for SS-OCT.

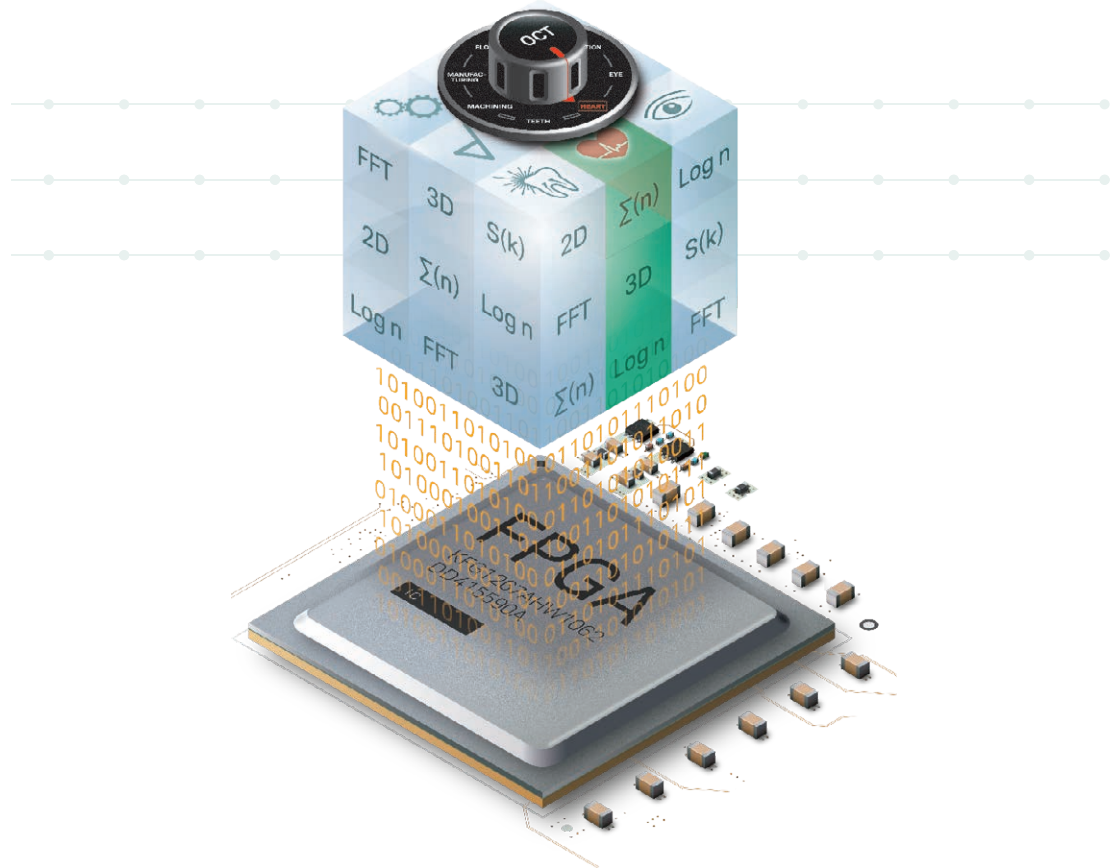


Figure 8. The FPGA allows dedicated real-time processing including FFT and K-clock re-sampling.

<sup>1</sup> The SS-OCT application firmware is a dedicated configuration and cannot be mixed with other functions or options, note it includes the basic capabilities of the standard digitizer mode.





# Technical specifications and characteristics

## Analog input (IN 1 and IN 2 - SMA connectors)

Number of channels	2	
Impedance	50 $\Omega$ $\pm$ 2 % (typical)	
Coupling	DC	
Full scale range (FSR)	500 mV and 2.5 V (selectable by software)	
Maximum input voltage	500 mV FSR 2.5 V FSR	$\pm$ 600 mVpk $\pm$ 3 Vpk
Input voltage offset	$\pm$ FSR/2	
Input frequency range (-3 dB bandwidth)	@ 2 GS/s	DC to 1.2 GHz (typical)
	@ 1 GS/s	DC to 475 MHz (typical)
Bandwidth limit filters (BWL)	20 MHz, 200 MHz, 700 MHz (nominal)	
Effective numbers of bits (ENOB) <sup>1</sup>	@ 410 MHz	9 (nominal)
Signal to noise distortion (SNR)	@ 410 MHz	55 dB (typical)
Spurious free dynamic range (SFDR)	@ 410 MHz	70 dBc (nominal)
Total harmonic distortion (THD)	@ 410 MHz	-70 dBc (typical)

## Calibration

The SA220P is factory calibrated and delivered with a certificate of calibration.

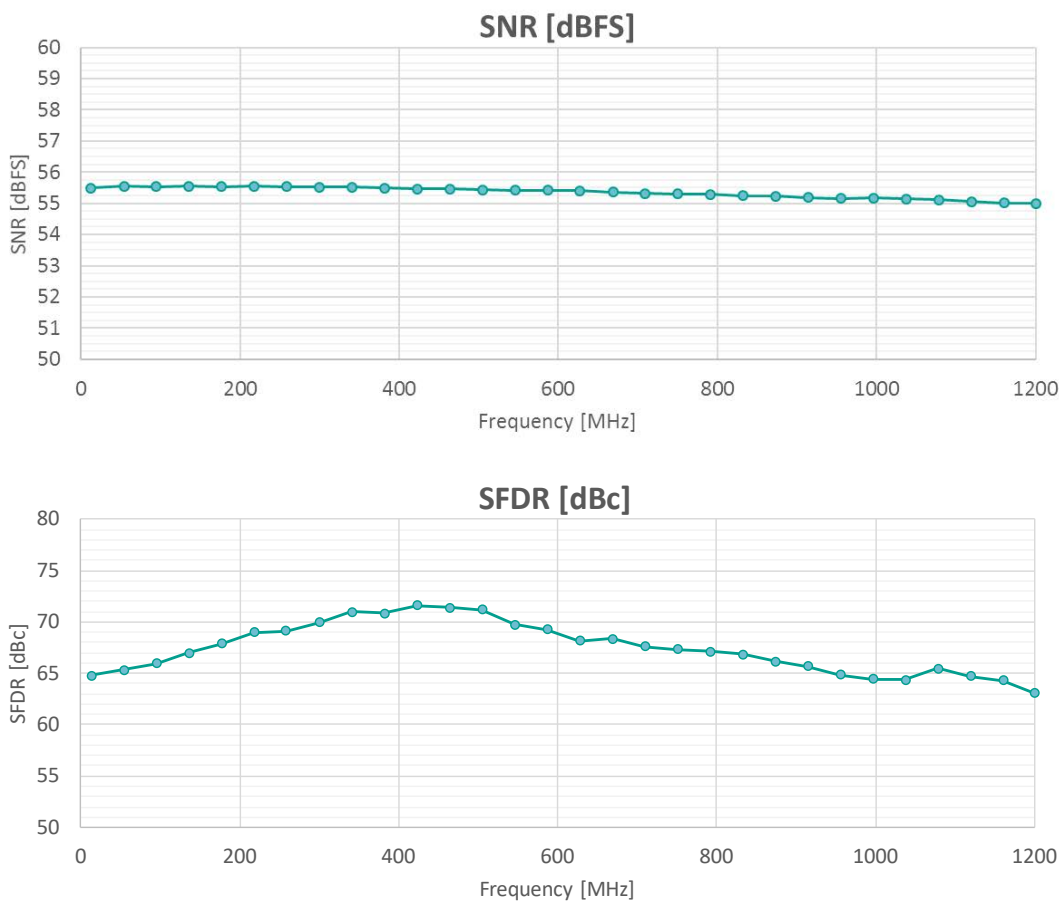


Figure 9. The SA220P offers stable signal performance across the overall bandwidth. Above figure corresponds to the SNR and SFDR measured on 16 channels, at 25°C, 0.5 V FSR, -1 dBFS.

1. Measured for a -1 dBFS input signal in internal clock mode at 2 GS/s.

# Technical specifications and characteristics

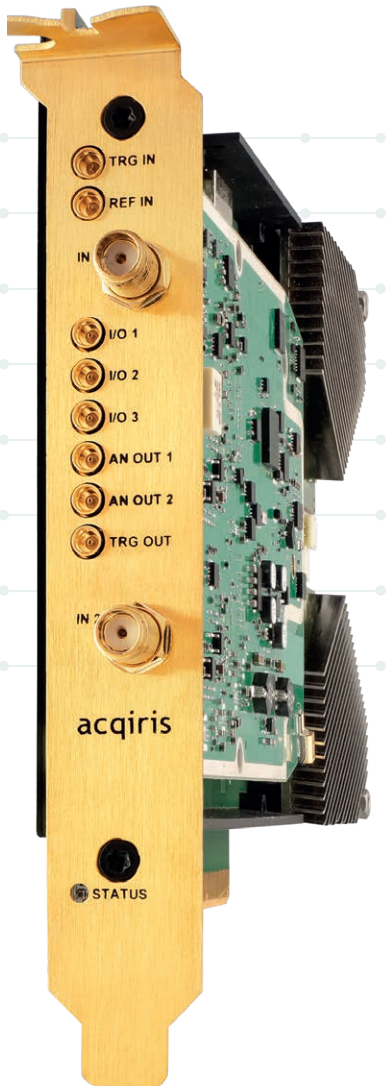


Figure 10. Open view of the SA220P.

Digital conversion		
Resolution		14 bits
Acquisition memory	-MEA ( <i>default</i> ) -MEB ( <i>optional</i> )	4 GB (1 GSamples/ch) 8 GB (2 GSamples/ch)
Sample clock source		Internal
Internal clock source		Internal, external reference
Real-time sampling rate	( <i>default</i> ) -LSR ( <i>optional</i> )	2 GS/s per channel 1 GS/s per channel
Sampling Clock jitter <sup>1</sup>		100 fs ( <i>nominal</i> )
Clock accuracy		± 1 ppm ( <i>nominal</i> )
External reference clock (REF IN - MMCX connector)		
Impedance		50 Ω ( <i>nominal</i> )
Frequency range		10 MHz ± 1 kHz 100 MHz ± 1 kHz
Signal level		-3 dBm to +3 dBm ( <i>nominal</i> )
Coupling		AC
Acquisition modes		Single record, Multi-record, Streaming
Trigger		
Trigger mode		Positive or negative edge
Trigger source		External, Channel, Software
Channel trigger frequency range		DC to 2.5 GHz ( <i>nominal</i> )
Trigger time interpolator resolution		< 1 ps ( <i>nominal</i> )
Trigger time interpolator precision		15 ps RMS ( <i>nominal</i> )
Rearm time (deadtime)		< 0.5 μs ( <i>nominal</i> )
External trigger (TRG IN - MMCX connector)		
Coupling		DC
Impedance		50 Ω
Level range		± 5 V
Minimum amplitude		0.5 V pk-pk
Frequency range		DC to 3 GHz
Trigger out (TRG OUT - MMCX connector)		1 (programmable), 50 Ω source, LVCMOS 3.3 V

1. Jitter figure based on phase noise integration from 100 Hz to 100 MHz in internal reference.



### Programmable IO (I/O 1, 2 and 3 - MMCX connectors)

Output functions		Acquisition active Trigger is armed Trigger accept re-synchronization Reference clock out
	-AVG	Self-trigger
	-AVG	Accumulation active
Output level range		DC coupling, 50 Ω source, LVCMOS 3.3 V
Input function	-AVG	Accumulation enable
Input level range		DC coupling, LVCMOS 3.3 V, max. voltage +5 V

### Analog Output (AN OUT 1 and 2 - MMCX connectors)

Output functions		Application dependent analog signal from a 16-bit DAC, controlled by the internal FPGA
Output level range		DC coupling, 300 Ω source, programmable output up to ± 10 V

### System requirements<sup>1</sup>

Topic	Windows	Linux
Operating systems	Windows 10 (32-bit and 64-bit), All versions Windows 7 (32-bit and 64-bit), All versions	Linux Kernel 2.6 or higher (32 or 64-bit), Debian 9, Ubuntu-16.04, Ubuntu-18.04, CentOS-7
Processor speed	1 GHz 32-bit (x86), 1 GHz 64-bit (x64), no support for Itanium 64	As per the minimum requirements of the chosen distribution
Available memory	1 GB minimum	As per the minimum requirements of the chosen distribution
Available disk space	1.5 GB available hard disk space, includes 1 GB for Microsoft .NET Framework	100 MB
Display	Minimum of 1024 x 768, 96 or 120 DPI	No display required
Temperature range	Check upon environment requirement. It might not allow to go as high as ADC card allows.	

### Definitions for specifications

**Specifications** describe the warranted performance of calibrated cards that have been stored for a minimum of 2 hours within the operating temperature range of 0 to 50 °C, unless otherwise stated, and after a 45-minute warm-up period. Data represented in this document are specifications unless otherwise noted.

**Characteristics** describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as Typical or Nominal values.

- Typical describes usual performance, which 80 % of cards will meet when operated over a 20 to 30 °C temperature range. Typical performance is not warranted.
- Nominal describes representative performance that is useful in the application of the product when operated over a 20 to 30 °C temperature range. Nominal performance is not warranted.

1. Contact [support@acqiris.com](mailto:support@acqiris.com) for a list of recommended host computers.

# Technical specifications and characteristics

## Quality

Samples of this product have been type tested and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions.

Environmental and physical		
Usage		Indoor use recommended (outdoor is possible provided the ADC card is within an environment that guarantee indoor conditions)
Pollution degree		2
Temperature range	Operating <sup>1,2</sup>	0 to +50 °C (sea-level to 10,000 feet)
		0 to +45 °C (10,000 to 15,000 feet)
	Non-operating	-40 to +70 °C
Altitude		Up to 15,000 feet (4 572 meters)
Relative humidity range	Operating <sup>3</sup>	10 % to 90 % RH, non-condensing
	Non-operating <sup>3</sup>	5 % to 95 % RH, non-condensing
Electro-magnetic compliance		Complies with European EMC Directive 2014/30/EU EN 61326-1:2013 (industrial) EN 55011:2016 Group 1, Class A And with international standards : IEC 61326-1:2012 CISPR 11:2015 / AMD1:2016 USA: CFR 47 Part 15, Subpart B, Class A Australia/New Zealand: AS/NZS CISPR 11:2011 Canada: ICES/NMB-001:2006
Safety		The product was tested and found to be in conformity with: IEC 61010-1:2010 IEC 61010-1:2010 / AMD1:2016 And National differences: - EU Group Differences - EU Special National Conditions - EU A-Deviations - AU, CA, KR, US Complies with European LVD Directive 2014/35/EU EN 61010-1:2010
Environmental		Directive 2015/863/EU (RoHS 3) EN 50581 :2012
Acoustic		Acoustic noise emission LpA < 60 dB ( <i>nominal</i> ) Operator position, Normal operation mode
Power dissipation <sup>4</sup>		
+ 3.3 V /+ 12 V		Power on PCIe edge connector < 15 W ( <i>nominal</i> )
+ 12 V		Power on additional power cable <sup>5</sup> < 35 W ( <i>nominal, firmware dependent</i> )
Mechanical characteristics		
Form factor		PCIe x8 standard
Size	Without fan <sup>6</sup>	17.6 W x 126.3 H x 169.5 D mm
	With rear fan <sup>7</sup>	40.6 W x 126.3 H x 244.1 D mm
Weight		< 1.24 kg

1. Host computer internal ambient temperature at intake of the digitizer's fan.
2. Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.
3. Tested in accordance with IEC 60068-2-30 and IEC 60068-2-78.
4. Power measured in digitizer mode.
5. Additional power cable mandatory to ensure adequate power distribution as per PCIe standard.
6. 60 m<sup>3</sup>/h airflow is required. The unit must be operated with the included fan.
7. Optional card retainer can be ordered to stabilize the PCIe card in the host computer.



# Configuration and ordering information

## Ordering information

Model	Description
SA220P	PCIe 14-bit ADC card with FPGA signal processing includes: <ul style="list-style-type: none"><li>- Fan assembled on module</li><li>- 5-year standard warranty</li><li>- Power cable</li></ul>
<b>Configurable options</b>	
Sampling rate version: 2 GS/s (default) or 1 GS/s	
Additional Memory	
Firmware and application options	
Card retainer (recommended if the card is assembled horizontally or in harsh environment)	



## Accessories

Model	Description
U5300A-101	MMCX male to SMA male cable, 1 m
U5300A-102	MMCX male to BNC male cable, 1 m
U5300A-001	Card Retainer
U5300A-003	Short card retainer

This information is subject to change without notice.

Published in Switzerland,  
April 2021

# Contacts



## Headquarters

Acqiris SA  
Chemin des Aulx 12  
1228 Plan-les-Ouates / Geneva  
Switzerland  
+41 22 884 32 90

---

Acqiris Americas  
[contact-americas@acqiris.com](mailto:contact-americas@acqiris.com)

Acqiris Asia-Pacific  
[contact-asia-pacific@acqiris.com](mailto:contact-asia-pacific@acqiris.com)

Acqiris Europe  
[contact-emea@acqiris.com](mailto:contact-emea@acqiris.com)

Acqiris Japan  
[contact-japan@acqiris.com](mailto:contact-japan@acqiris.com)

---

Support  
[support@acqiris.com](mailto:support@acqiris.com)